




BGW-Anchor channels

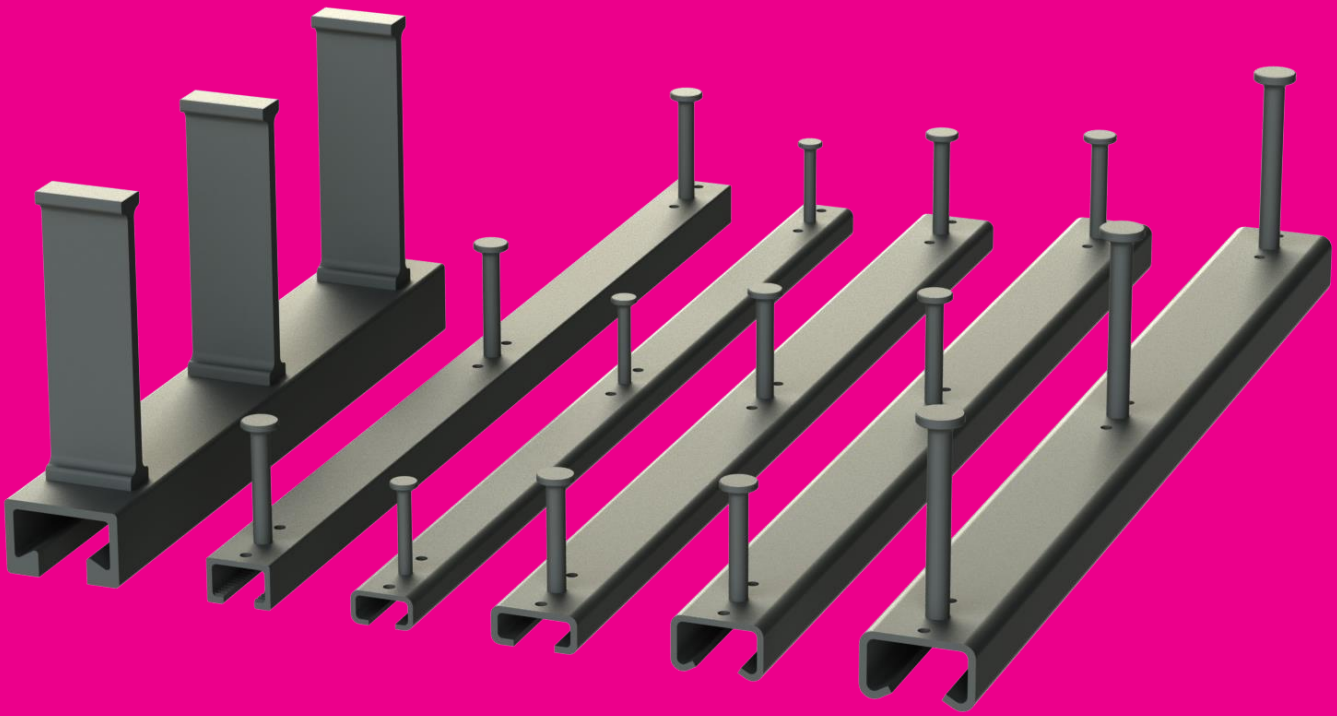

bohr GmbH
GERMAN QUALITY
SINCE 1986

BGW anchor channels (AS)-28/15 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval for anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-28/15

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-28/15-100	(fv)	AS-28/15-100E	(V4A)	28/15	100	2	0,134	5,50	17,00
AS-28/15-150	(fv)	AS-28/15-150E	(V4A)	28/15	150	2	0,189	6,00	19,00
AS-28/15-200	(fv)	AS-28/15-200E	(V4A)	28/15	200	2	0,244	6,50	21,00
AS-28/15-250	(fv)	AS-28/15-250E	(V4A)	28/15	250	2	0,299	7,50	22,50
AS-28/15-300	(fv)	AS-28/15-300E	(V4A)	28/15	300	2	0,366	8,00	25,00
AS-28/15-350	(fv)	AS-28/15-350E	(V4A)	28/15	350	3	0,421	10,50	31,50
AS-28/15-450	(fv)	AS-28/15-450E	(V4A)	28/15	450	3	0,530	11,50	36,00
AS-28/15-550	(fv)	AS-28/15-550E	(V4A)	28/15	550	3	0,640	14,00	41,00
AS-28/15-850	(fv)	AS-28/15-850E	(V4A)	28/15	850	4	0,981	19,50	59,50
AS-28/15-1050	(fv)	AS-28/15-1050E	(V4A)	28/15	1050	5	1,213	24,50	75,00
AS-28/15-3050	(fv)	AS-28/15-3050E	(V4A)	28/15	3050	13	3,504	58,00	208,50
AS-28/15-6070	(fv)	AS-28/15-6070E	(V4A)	28/15	6070	25	6,963	110,00	395,00

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-38/17 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval Anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-38/17

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-38/17-100	(fv)	AS-38/17-100E	(V4A)	38/17	100	2	0,216	6,50	20,00
AS-38/17-150	(fv)	AS-38/17-150E	(V4A)	38/17	150	2	0,306	7,50	24,50
AS-38/17-200	(fv)	AS-38/17-200E	(V4A)	38/17	200	2	0,397	8,50	27,50
AS-38/17-250	(fv)	AS-38/17-250E	(V4A)	38/17	250	2	0,488	9,50	30,50
AS-38/17-300	(fv)	AS-38/17-300E	(V4A)	38/17	300	2	0,596	10,50	34,00
AS-38/17-350	(fv)	AS-38/17-350E	(V4A)	38/17	350	3	0,687	14,50	42,50
AS-38/17-450	(fv)	AS-38/17-450E	(V4A)	38/17	450	3	0,869	15,50	49,50
AS-38/17-550	(fv)	AS-38/17-550E	(V4A)	38/17	550	3	1,050	17,50	59,00
AS-38/17-850	(fv)	AS-38/17-850E	(V4A)	38/17	850	4	1,613	23,50	81,00
AS-38/17-1050	(fv)	AS-38/17-1050E	(V4A)	38/17	1050	5	1,993	31,00	108,00
AS-38/17-2050	(fv)	AS-38/17-2050E	(V4A)	38/17	2050	5	3,860		
AS-38/17-2350	(fv)	AS-38/17-2350E	(V4A)	38/17	2350	1	4,520		
AS-38/17-3050	(fv)	AS-38/17-3050E	(V4A)	38/17	3050	13	5,763	77,00	314,00
AS-38/17-6070	(fv)	AS-38/17-6070E	(V4A)	38/17	6070	25	11,455	147,00	596,00

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-40/25 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-40/25

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-40/25-100	(fv)	AS-40/25-100E	(V4A)	40/25	100	2	0,270		
AS-40/25-150	(fv)	AS-40/25-150E	(V4A)	40/25	150	2	0,374	9,00	27,50
AS-40/25-200	(fv)	AS-40/25-200E	(V4A)	40/25	200	2	0,478	10,00	31,00
AS-40/25-250	(fv)	AS-40/25-250E	(V4A)	40/25	250	2	0,582	11,00	36,50
AS-40/25-300	(fv)	AS-40/25-300E	(V4A)	40/25	300	2	0,716	11,50	42,00
AS-40/25-350	(fv)	AS-40/25-350E	(V4A)	40/25	350	3	0,820	14,50	50,00
AS-40/25-400	(fv)	AS-40/25-400E	(V4A)	40/25	400	3	0,924	15,50	55,00
AS-40/25-550	(fv)	AS-40/25-550E	(V4A)	40/25	550	3	1,236	19,00	69,50
AS-40/25-800	(fv)	AS-40/25-800E	(V4A)	40/25	800	4	1,787	26,00	100,00
AS-40/25-1000	(fv)	AS-40/25-1000E	(V4A)	40/25	1000	5	2,250		
AS-40/25-1050	(fv)	AS-40/25-1050E	(V4A)	40/25	1050	5	2,363	33,50	128,00
AS-40/25-1250-33	(fv)	AS-40/25-1250-33E	(V4A)	40/25	1250	5			
AS-40/25-1550	(fv)	AS-40/25-1550E	(V4A)	40/25	1550	5	3,488		
AS-40/25-3050	(fv)	AS-40/25-3050E	(V4A)	40/25	3050	13	6,745	90,00	555,00
AS-40/25-6070	(fv)	AS-40/25-6070E	(V4A)	40/25	6070	25	13,396	172,00	677,00

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-49/30, -50/30 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval Anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-49/30; -50/30

Article no.				Profile	Length mm	Quantit y	Weight kg/piece	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor		fv	V4A
AS-49/30-100	(fv)	AS-49/30-100E	(V4A)	49/30	100	2	0,420		
AS-50/30-100	(fv)	AS-50/30-100E	(V4A)	50/30	"	"	"	"	"
AS-49/30-150	(fv)	AS-49/30-150E	(V4A)	49/30	150	2	0,569	12,00	33,00
AS-50/30-150	(fv)	AS-50/30-150E	(V4A)	50/30	"	"	"	"	"
AS-49/30-200	(fv)	AS-49/30-200E	(V4A)	49/30	200	2	0,723	13,00	38,00
AS-50/30-200	(fv)	AS-50/30-200E	(V4A)	50/30	"	"	"	"	"
AS-49/30-250	(fv)	AS-49/30-250E	(V4A)	49/30	250	2	0,877	14,00	44,00
AS-50/30-250	(fv)	AS-50/30-250E	(V4A)	50/30	"	"	"	"	"
AS-49/30-300	(fv)	AS-49/30-300E	(V4A)	49/30	300	2	1,085	15,00	51,00
AS-50/30-300	(fv)	AS-50/30-300E	(V4A)	50/30	"	"	"	"	"
AS-49/30-350	(fv)	AS-49/30-350E	(V4A)	49/30	350	3	1,238	19,50	62,00
AS-50/30-350	(fv)	AS-50/30-350E	(V4A)	50/30	"	"	"	"	"
AS-49/30-400	(fv)	AS-49/30-400E	(V4A)	49/30	400	3	1,392	21,00	68,50
AS-50/30-400	(fv)	AS-50/30-400E	(V4A)	50/30	"	"	"	"	"
AS-49/30-550	(fv)	AS-49/30-550E	(V4A)	49/30	550	3	1,853	24,00	89,00
AS-50/30-550	(fv)	AS-50/30-550E	(V4A)	50/30	"	"	"	"	"
AS-49/30-800	(fv)	AS-49/30-800E	(V4A)	49/30	800	4	2,675	33,50	125,00
AS-50/30-800	(fv)	AS-50/30-800E	(V4A)	50/30	"	"	"	"	"
AS-49/30-1050	(fv)	AS-49/30-1050E	(V4A)	49/30	1050	5	3,498	41,50	164,00
AS-50/30-1050	(fv)	AS-50/30-1050E	(V4A)	50/30	"	"	"	"	"
AS-49/30-3050	(fv)	AS-49/30-3050E	(V4A)	49/30	3050	13	10,077	119,00	470,00
AS-50/30-3050	(fv)	AS-50/30-3050E	(V4A)	50/30	"	"	"	"	"
AS-49/30-6070	(fv)	AS-49/30-6070E	(V4A)	49/30	6070	25	20,008	227,50	895,00
AS-50/30-6070	(fv)	AS-50/30-6070E	(V4A)	50/30	"	"	"	"	"

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-53/34, -54/33 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf


English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-53/34; -54/33

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-53/34-150K	(fv)	AS-53/34-150KE	(V4A)	53/34	150	2	0,488	20,50	58,50
AS-54/34-150K	(fv)	AS-54/34-150KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-200K	(fv)	AS-53/34-200KE	(V4A)	53/34	200	2	0,650	23,50	69,00
AS-54/33-200K	(fv)	AS-54/34-200KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-250K	(fv)	AS-53/34-250KE	(V4A)	53/34	250	2	0,813	26,50	79,50
AS-54/33-250K	(fv)	AS-54/34-250KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-300K	(fv)	AS-53/34-300KE	(V4A)	53/34	300	2	1,530	29,50	89,50
AS-54/33-300K	(fv)	AS-54/34-300KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-350K	(fv)	AS-53/34-350KE	(V4A)	53/34	350	3	1,785	35,50	114,00
AS-54/33-350K	(fv)	AS-54/34-350KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-400K	(fv)	AS-53/34-400KE	(V4A)	53/34	400	3	2,040	38,50	124,00
AS-54/33-400K	(fv)	AS-54/34-400KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-550K	(fv)	AS-53/34-550KE	(V4A)	53/34	550	3	2,805	47,50	155,00
AS-54/33-550K	(fv)	AS-54/34-550KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-800K	(fv)	AS-53/34-800KE	(V4A)	53/34	800	4	4,080	66,00	220,50
AS-54/33-800K	(fv)	AS-54/34-800KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-1050K	(fv)	AS-53/34-1050KE	(V4A)	53/34	1050	5	5,355	103,50	286,00
AS-54/33-1050K	(fv)	AS-54/34-1050KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-3050K	(fv)	AS-53/34-3050KE	(V4A)	53/34	3050	13	15,300	219,50	790,00
AS-54/33-3050K	(fv)	AS-54/34-3050KE	(V4A)	54/33	"	"	"	"	"
AS-53/34-6070K	(fv)	AS-53/34-6070KE	(V4A)	53/34	6070	25	30,600	479,00	1.325,50
AS-54/33-6070K	(fv)	AS-54/34-6070KE	(V4A)	54/33	"	"	"	"	"

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf

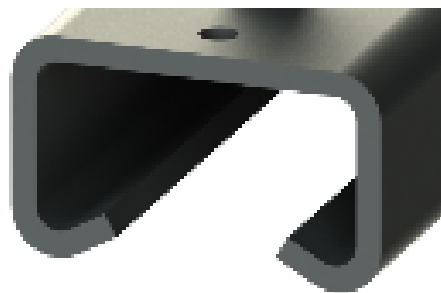

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-72/48, -72/49 cold-rolled


Rail channel sealed with soft, easily removable foam filling.

with European Technical Approval

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf


English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-72/48; -72/49

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
Hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-72/48-150K	(fv)	AS-72/48-150KE	(V4A)	72/48	150	2	1,358	41,00	94,00
AS-72/49-150K	(fv)	AS-72/49-150KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-200K	(fv)	AS-72/48-200KE	(V4A)	72/48	200	2	1,810	44,00	106,50
AS-72/49-200K	(fv)	AS-72/49-200KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-250K	(fv)	AS-72/48-250KE	(V4A)	72/48	250	2	2,263	47,50	119,50
AS-72/49-250K	(fv)	AS-72/49-250KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-300K	(fv)	AS-72/48-300KE	(V4A)	72/48	300	2	2,715	50,50	132,50
AS-72/49-300K	(fv)	AS-72/49-300KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-350K	(fv)	AS-72/48-350KE	(V4A)	72/48	350	3	3,168	54,00	145,50
AS-72/49-350K	(fv)	AS-72/49-350KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-400K	(fv)	AS-72/48-400KE	(V4A)	72/48	400	3	3,620	69,00	183,00
AS-72/49-400K	(fv)	AS-72/49-400KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-550K	(fv)	AS-72/48-550KE	(V4A)	72/48	550	3	4,978	77,50	222,00
AS-72/49-550K	(fv)	AS-72/49-550KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-800K	(fv)	AS-72/48-800KE	(V4A)	72/48	800	4	7,240	106,00	310,00
AS-72/49-800K	(fv)	AS-72/49-800KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-1050K	(fv)	AS-72/48-1050KE	(V4A)	72/48	1050	5	9,503	156,50	393,00
AS-72/49-1050K	(fv)	AS-72/49-1050KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-3050K	(fv)	AS-72/48-3050KE	(V4A)	72/48	3050	13	27,150	301,50	1.015,00
AS-72/49-3050K	(fv)	AS-72/49-3050KE	(V4A)	72/49	"	"	"	"	"
AS-72/48-6070K	(fv)	AS-72/48-6070KE	(V4A)	72/48	6070	25	54,300	728,50	2.009,50
AS-72/49-6070K	(fv)	AS-72/49-6070KE	(V4A)	72/49	"	"	"	"	"

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf

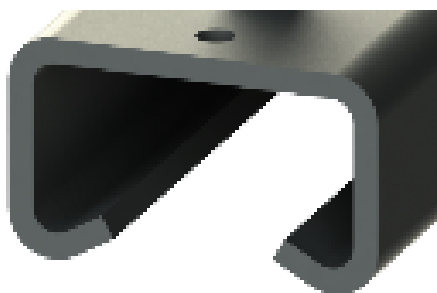

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.


BGW anchor channels (AS)-40/22 hot-rolled

Rail channel sealed with soft, easily removable foam filling. with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>


English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-40/22

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-40/22-150	(fv)	AS-40/22-150E	(V4A)	40/22	150	2	0,408	10,00	33,50
AS-40/22-200	(fv)	AS-40/22-200E	(V4A)	40/22	200	2	0,524	10,50	41,00
AS-40/22-250	(fv)	AS-40/22-250E	(V4A)	40/22	250	2	0,639	14,50	52,50
AS-40/22-300	(fv)	AS-40/22-300E	(V4A)	40/22	300	2	0,755	16,00	61,00
AS-40/22-350	(fv)	AS-40/22-350E	(V4A)	40/22	350	3	0,901	17,50	66,00
AS-40/22-400	(fv)	AS-40/22-400E	(V4A)	40/22	400	3	1,016	19,50	73,50
AS-40/22-550	(fv)	AS-40/22-550E	(V4A)	40/22	550	3	1,363	26,00	97,50
AS-40/22-800	(fv)	AS-40/22-800E	(V4A)	40/22	800	4	1,971	34,50	143,50
AS-40/22-1050	(fv)	AS-40/22-1050E	(V4A)	40/22	1050	5	2,579	43,50	187,00
AS-40/22-1300	(fv)	AS-40/22-1300E	(V4A)	40/22	1300	6	3,188	55,50	
AS-40/22-1550	(fv)	AS-40/22-1550E	(V4A)	40/22	1550	7	3,796	65,50	
AS-40/22-1800	(fv)	AS-40/22-1800E	(V4A)	40/22	1800	8	4,404	75,50	
AS-40/22-2050	(fv)	AS-40/22-2050E	(V4A)	40/22	2050	9	5,013	85,50	
AS-40/22-2300	(fv)	AS-40/22-2300E	(V4A)	40/22	2300	10	5,621	95,50	
AS-40/22-2550	(fv)	AS-40/22-2550E	(V4A)	40/22	2550	11	6,229	105,00	
AS-40/22-3050	(fv)	AS-40/22-3050E	(V4A)	40/22	3050	13	7,446	111,50	495,00
AS-40/22-6070	(fv)	AS-40/22-6070E	(V4A)	40/22	6070	25	14,792	215,50	988,00

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

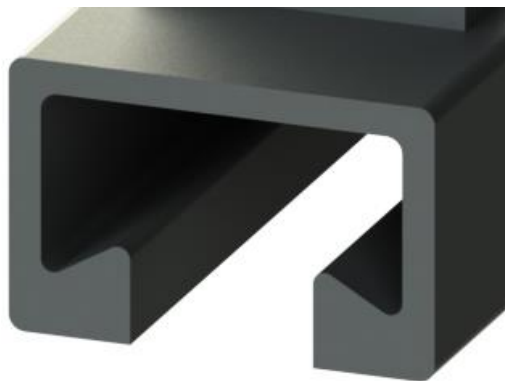

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-50/30 hot-rolled


Rail channel sealed with soft, easily removable foam filling. with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-50/30



Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-50/30 -150	(fv)	AS-50/30-150E	(V4A)	50/30	150	2	0,648	14,00	49,50
AS-50/30-200	(fv)	AS-50/30-200E	(V4A)	50/30	200	2	0,828	16,50	59,50
AS-50/30-250	(fv)	AS-50/30-250E	(V4A)	50/30	250	2	1,008	19,00	69,50
AS-50/30-300	(fv)	AS-50/30-300E	(V4A)	50/30	300	2	1,188	21,50	81,00
AS-50/30-350	(fv)	AS-50/30-350E	(V4A)	50/30	350	3	1,422	26,00	99,50
AS-50/30-400	(fv)	AS-50/30-400E	(V4A)	50/30	400	3	1,602	28,00	111,00
AS-50/30-550	(fv)	AS-50/30-550E	(V4A)	50/30	550	3	2,142	36,00	142,00
AS-50/30-800	(fv)	AS-50/30-800E	(V4A)	50/30	800	4	3,096	50,00	203,50
AS-50/30-1050	(fv)	AS-50/30-1050E	(V4A)	50/30	1050	5	4,050	64,50	264,50
AS-50/30-1300	(fv)	AS-50/30-1300E	(V4A)	50/30	1300	5	5,384	85,00	
AS-50/30-1550	(fv)	AS-50/30-1550E	(V4A)	50/30	1550	7	6,520	101,30	
AS-50/30-1800	(fv)	AS-50/30-1800E	(V4A)	50/30	1800	8	7,460	117,50	
AS-50/30-2050	(fv)	AS-50/30-2050E	(V4A)	50/30	2050	9	8,500	139,95	
AS-50/30-2300	(fv)	AS-50/30-2300E	(V4A)	50/30	2300	10	9,560	150,20	
AS-50/30-2550	(fv)	AS-50/30-2550E	(V4A)	50/30	2550	11	10,580	160,00	
AS-50/30-3050	(fv)	AS-50/30-3050E	(V4A)	50/30	3050	13	11,682	170,00	755,00
AS-50/30-6070	(fv)	AS-50/30-6070E	(V4A)	50/30	6070	25	23,202	303,00	1.389,00

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.


BGW anchor channels (AS)-52/34,-53/34 hot rolled

Rail channel sealed with soft, easily removable foam filling.
with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf


English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-52/34

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-52/34-150	(fv)	AS-52/34-150E	(V4A)	52/34	150	2	1,092	20,00	66,00
AS-53/34-150	(fv)	AS-53/34-150E	(V4A)	53/34	"	"	"	"	"
AS-52/34-200	(fv)	AS-52/34-200E	(V4A)	52/34	200	2	1,376	23,00	80,50
AS-53/34-200	(fv)	AS-53/34-200E	(V4A)	53/34	"	"	"	"	"
AS-52/34-250	(fv)	AS-52/34-250E	(V4A)	52/34	250	2	1,661	25,50	95,00
AS-53/34-250	(fv)	AS-53/34-250E	(V4A)	53/34	"	"	"	"	"
AS-52/34-300	(fv)	AS-52/34-300E	(V4A)	52/34	300	2	1,945	28,50	109,00
AS-53/34-300	(fv)	AS-53/34-300E	(V4A)	53/34	"	"	"	"	"
AS-52/34-350	(fv)	AS-52/34-350E	(V4A)	52/34	350	3	2,349	36,00	131,00
AS-53/34-350	(fv)	AS-53/34-350E	(V4A)	53/34	"	"	"	"	"
AS-52/34-400	(fv)	AS-52/34-400E	(V4A)	52/34	400	3	2,633	39,00	145,00
AS-53/34-400	(fv)	AS-53/34-400E	(V4A)	53/34	"	"	"	"	"
AS-52/34-550	(fv)	AS-52/34-550E	(V4A)	52/34	550	3	3,485	48,00	188,00
AS-53/34-550	(fv)	AS-53/34-550E	(V4A)	53/34	"	"	"	"	"
AS-52/34-800	(fv)	AS-52/34-800E	(V4A)	52/34	800	4	5,026	67,50	265,50
AS-53/34-800	(fv)	AS-53/34-800E	(V4A)	53/34	"	"	"	"	"
AS-52/34-1050	(fv)	AS-52/34-1050E	(V4A)	52/34	1050	5	5,880	120,00	368,50
AS-53/34-1050	(fv)	AS-53/34-1050E	(V4A)	53/34	"	"	"	"	"
AS-52/34-3050	(fv)	AS-52/34-3050E	(V4A)	52/34	3050	13	16,800	265,50	1.026,00
AS-53/34-3050	(fv)	AS-53/34-3050E	(V4A)	53/34	"	"	"	"	"
AS-52/34-4500	(fv)	AS-52/34-4500E	(V4A)	52/34	4500	13			
AS-53/34-4500	(fv)	AS-53/34-4500E	(V4A)	53/34	"	"	"	"	"
AS-52/34-5000	(fv)	AS-52/34-5000E	(V4A)	52/34	5000	13			
AS-53/34-5000	(fv)	AS-53/34-5000E	(V4A)	53/34	"	"	"	"	"
AS-52/34-6070	(fv)	AS-52/34-6070E	(V4A)	52/34	6070	25	33,600	490,00	1.957,00
AS-53/34-6070	(fv)	AS-53/34-6070E	(V4A)	53/34	"	"	"	"	"

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf

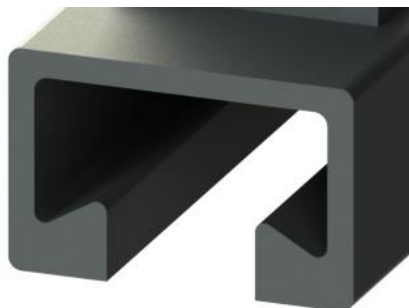

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.


BGW anchor channels (AS)-55/42 hot-rolled

Rail channel sealed with soft, easily removable foam filling. with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>


English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-55/42

Article no.				Profile	Length mm	Quantity Anchor	Weight kg/piece	Price €/unit	
hot-dip galvanised (fv)		Stainless steel (V4A)						fv	V4A
AS-55/42-150	(fv)	AS-55/42-150E	(V4A)	55/42	150	2	1,155	23,00	
AS-55/42-200	(fv)	AS-55/42-200E	(V4A)	55/42	200	2	1,540	27,00	
AS-55/42-250	(fv)	AS-55/42-250E	(V4A)	55/42	250	2	1,925	29,50	
AS-55/42-300	(fv)	AS-55/42-300E	(V4A)	55/42	300	2	2,310	33,50	
AS-55/42-350	(fv)	AS-55/42-350E	(V4A)	55/42	350	3	2,695	38,00	
AS-55/42-400	(fv)	AS-55/42-400E	(V4A)	55/42	400	3	3,080	48,50	
AS-55/42-550	(fv)	AS-55/42-550E	(V4A)	55/42	550	3	4,235	59,00	
AS-55/42-800	(fv)	AS-55/42-800E	(V4A)	55/42	800	4	6,160	81,50	
AS-55/42-1050	(fv)	AS-55/42-1050E	(V4A)	55/42	1050	5	8,085	88,00	
AS-55/42-3050	(fv)	AS-55/42-3050E	(V4A)	55/42	3050	13	23,100	243,00	
AS-55/42-6070	(fv)	AS-55/42-6070E	(V4A)	55/42	6070	25	46,200	483,00	

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

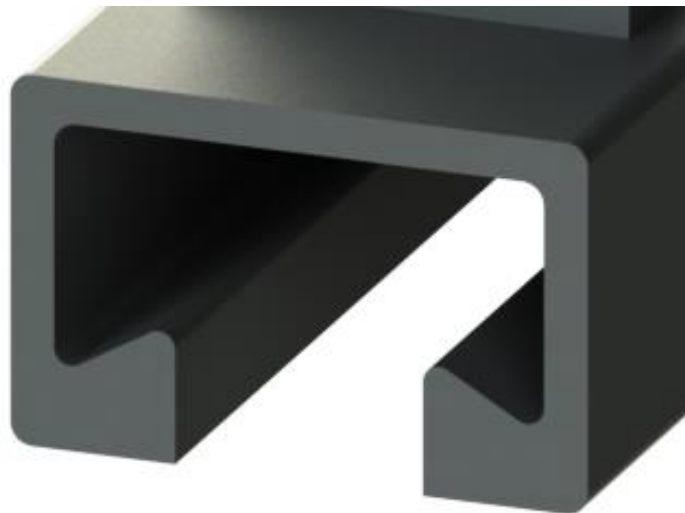

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.


BGW anchor channels (AS)-72/48 hot-rolled

Rail channel sealed with soft, easily removable foam filling. with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:

https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>



AS-72/4

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-72/48-150W	(fv)	AS-72/48-150WE	(V4A)	72/48	150	2	1,470	32,00	130,50
AS-72/48-200W	(fv)	AS-72/48-200WE	(V4A)	72/48	200	2	1,960	36,00	156,50
AS-72/48-250W	(fv)	AS-72/48-250WE	(V4A)	72/48	250	2	2,450	39,50	182,00
AS-72/48-300W	(fv)	AS-72/48-300WE	(V4A)	72/48	300	2	2,940	43,50	208,00
AS-72/48-350W	(fv)	AS-72/48-350WE	(V4A)	72/48	350	3	3,430	56,00	233,50
AS-72/48-400W	(fv)	AS-72/48-400WE	(V4A)	72/48	400	3	3,920	60,00	283,50
AS-72/48-550W	(fv)	AS-72/48-550WE	(V4A)	72/48	550	3	5,390	75,00	361,00
AS-72/48-800W	(fv)	AS-72/48-800WE	(V4A)	72/48	800	4	7,840	112,00	512,00
AS-72/48-1050W	(fv)	AS-72/48-1050WE	(V4A)	72/48	1050	5	10,290	135,50	573,50
AS-72/48-3050W	(fv)	AS-72/48-3050WE	(V4A)	72/48	3050	13	29,400	317,50	1.764,00
AS-72/48-6070W	(fv)	AS-72/48-6070WE	(V4A)	72/48	6070	25	58,800	743,00	3.281,00

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf



Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-29/20 hot-rolled, serrated

Channel closed with soft, easily removable foam filling.

ETA approval Anchor channels with screws:


<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-29/20

Article no.				Profile	Length mm	Quantity Anchor	Weight kg/piece	Price €/unit fv	Price €/unit V4A
hot-dip galvanised (fv)		Stainless steel (V4A)							
AS-29/20-100	(fv)	AS-29/20-100E	(V4A)	29/20	100	2	0,247		
AS-29/20-150	(fv)	AS-29/20-150E	(V4A)	29/20	150	2	0,255	10,00	
AS-29/20-200	(fv)	AS-29/20-200E	(V4A)	29/20	200	2	0,340	11,50	
AS-29/20-250	(fv)	AS-29/20-250E	(V4A)	29/20	250	2	0,425	12,50	
AS-29/20-300	(fv)	AS-29/20-300E	(V4A)	29/20	300	2	0,510	13,50	
AS-29/20-350	(fv)	AS-29/20-350E	(V4A)	29/20	350	3	0,595	18,00	
AS-29/20-450	(fv)	AS-29/20-450E	(V4A)	29/20	450	3	0,680	19,00	
AS-29/20-550	(fv)	AS-29/20-550E	(V4A)	29/20	550	3	0,935	22,50	
AS-29/20-850	(fv)	AS-29/20-850E	(V4A)	29/20	850	4	1,360	35,50	
AS-29/20-1050	(fv)	AS-29/20-1050E	(V4A)	29/20	1050	5	1,785	39,50	
AS-29/20-3050	(fv)	AS-29/20-3050E	(V4A)	29/20	3050	13	5,100	107,50	
AS-29/20-6070	(fv)	AS-29/20-6070E	(V4A)	29/20	6070	25	10,200	207,00	

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

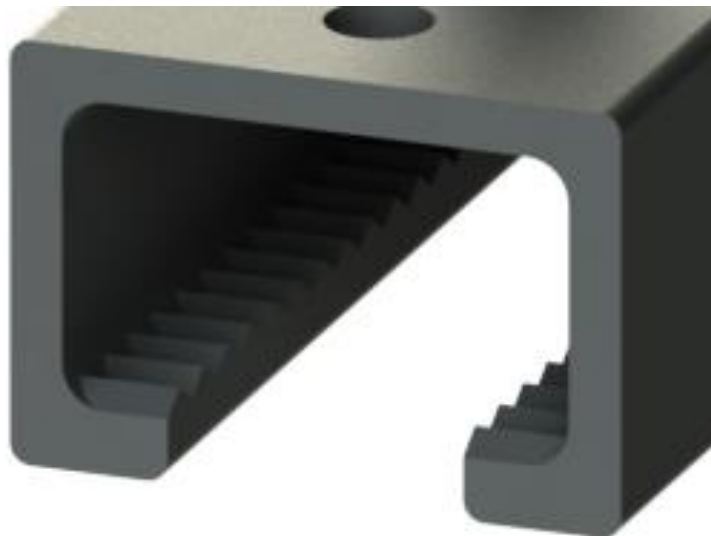

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-38/23 hot-rolled, serrated

Rail channel sealed with soft, easily removable foam filling.
with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:


<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-38/23

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-38/23-100	(fv)	AS-38/23-100E	(V4A)	38/23	100	2	0,326		
AS-38/23-150	(fv)	AS-38/23-150E	(V4A)	38/23	150	2	0,405	14,00	47,00
AS-38/23-200	(fv)	AS-38/23-200E	(V4A)	38/23	200	2	0,540	16,00	58,50
AS-38/23-250	(fv)	AS-38/23-250	(V4A)	38/23	250	2	0,675	17,50	69,50
AS-38/23-300	(fv)	AS-38/23-300E	(V4A)	38/23	300	2	0,810	19,50	81,00
AS-38/23-350	(fv)	AS-38/23-350E	(V4A)	38/23	350	3	0,945	24,50	97,50
AS-38/23-450	(fv)	AS-38/23-450E	(V4A)	38/23	450	3	1,080	36,00	108,50
AS-38/23-550	(fv)	AS-38/23-550E	(V4A)	38/23	550	3	1,485	31,50	142,00
AS-38/23-850	(fv)	AS-38/23-850E	(V4A)	38/23	850	4	2,160	43,50	203,00
AS-38/23-1050	(fv)	AS-38/23-1050E	(V4A)	38/23	1050	5	2,835	56,00	264,50
AS-38/23-3050	(fv)	AS-38/23-3050E	(V4A)	38/23	3050	13	8,100	148,00	755,00
AS-38/23-6070	(fv)	AS-38/23-6070E	(V4A)	38/23	6070	25	16,200	285,50	1.389,50

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

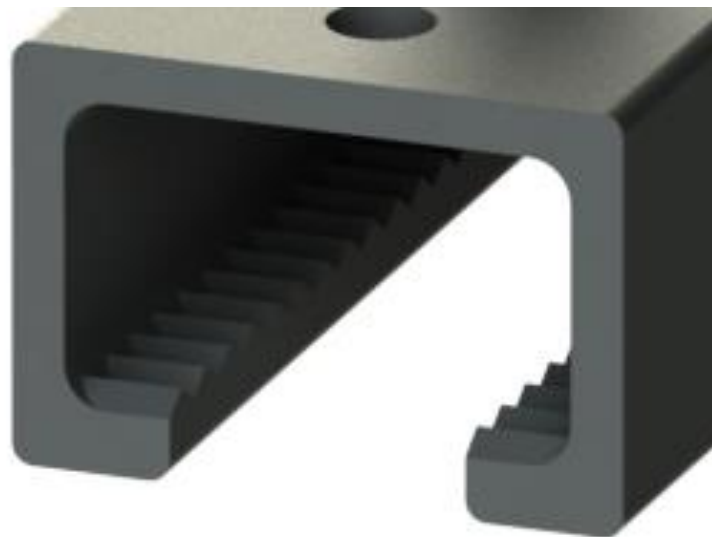

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-53/34 hot-rolled, serrated

Rail channel sealed with soft, easily removable foam filling.

ETA approval Anchor channels with screws:


<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-53/34

Article no.				Profile	Length mm	Quantity Anchor	Weight kg/piece	Price €/unit	
hot-dip galvanised (fv)		Stainless steel (V4A)						fv	V4A
AS-53/34-150	(fv)	AS-53/34-150E	(V4A)	53/34	150	2	0,825	20,50	129,50
AS-53/34-200	(fv)	AS-53/34-200E	(V4A)	53/34	200	2	1,100	32,00	154,00
AS-53/34-250	(fv)	AS-53/34-250E	(V4A)	53/34	250	2	1,375	39,50	175,50
AS-53/34-300	(fv)	AS-53/34-300E	(V4A)	53/34	300	2	1,650	43,00	197,00
AS-53/34-350	(fv)	AS-53/34-350E	(V4A)	53/34	350	3	1,925	56,00	251,00
AS-53/34-400	(fv)	AS-53/34-400E	(V4A)	53/34	400	3	2,200	59,50	273,50
AS-53/34-550	(fv)	AS-53/34-550E	(V4A)	53/34	550	3	3,025	68,50	340,50
AS-53/34-800	(fv)	AS-53/34-800E	(V4A)	53/34	800	4	4,400	94,50	481,00
AS-53/34-1050	(fv)	AS-53/34-1050E	(V4A)	53/34	1050	5	5,775	133,50	613,50
AS-53/34-3050	(fv)	AS-53/34-3050E	(V4A)	53/34	3050	13	16,500	303,00	1.661,50
AS-53/34-6070	(fv)	AS-53/34-6070E	(V4A)	53/34	6070	25	33,000	709,00	3.281,00

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

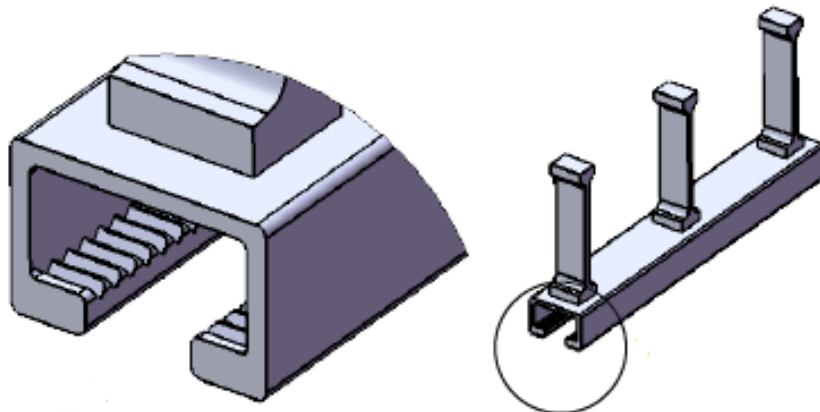

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-64/44 hot-rolled, serrated

Rail channel sealed with soft, easily removable foam filling.
with European Technical Approval ETA-16/0387

ETA approval Anchor channels with screws:


https://www.BGW-bohr.de/pdf/Ankerschienen_ETa-Zulassung-2017.pdf

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-64/44

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)		Stainless steel (V4A)				Anchor	kg/piece	fv	V4A
AS-64/44-150	(fv)	AS-64/44-150E	(V4A)	64/44	150	2	1,245	63,00	
AS-64/44-200	(fv)	AS-64/44-200E	(V4A)	64/44	200	2	1,660	70,50	
AS-64/44-250	(fv)	AS-64/44-250E	(V4A)	64/44	250	2	2,075	77,50	
AS-64/44-300	(fv)	AS-64/44-300E	(V4A)	64/44	300	2	2,490	85,00	
AS-64/44-350	(fv)	AS-64/44-350E	(V4A)	64/44	350	3	2,905	105,30	
AS-64/44-400	(fv)	AS-64/44-400E	(V4A)	64/44	400	3	3,320	114,50	
AS-64/44-550	(fv)	AS-64/44-550E	(V4A)	64/44	550	3	4,565	135,50	
AS-64/44-800	(fv)	AS-64/44-800E	(V4A)	64/44	800	4	6,640	189,00	
AS-64/44-1050	(fv)	AS-64/44-1050E	(V4A)	64/44	1050	5	8,715	271,50	
AS-64/44-3050	(fv)	AS-64/44-3050E	(V4A)	64/44	3050	13	24,900	605,50	
AS-64/44-6070	(fv)	AS-64/44-6070E	(V4A)	64/44	6070	25	49,800	1.376,00	

Pictures manufacturer tensile tests: https://www.bgw-bohr.de/pdf/Ankerschienen_Testversuche.pdf

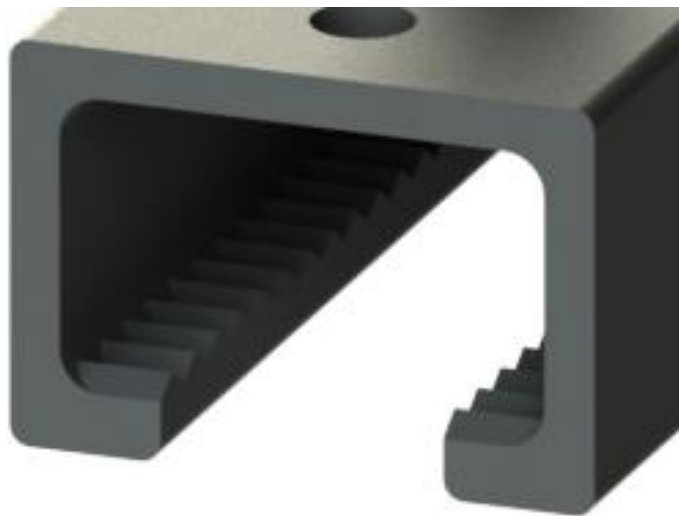

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.

BGW anchor channels (AS)-41/22 cold-rolled, serrated

Rail channel sealed with soft, easily removable foam filling.

ETA approval Anchor channels with screws:

<https://www.BGW-bohr.de/pdf/Ankerschienen ETA-Zulassung-2017.pdf>

English Version: <https://www.BGW-bohr.de/pdf/ETA-Zulassung-Englisch-2017.pdf>

AS-41/22

Article no.				Profile	Length mm	Quantity	Weight	Price €/unit	Price €/unit
hot-dip galvanised (fv)	Stainless steel (V4A)					Anchor	kg/piece	fv	V4A
AS-41/22-100	(fv)	AS-41/22-100E	(V4A)	41/22	100	2	0,230	8,50	24,00
AS-41/22-150	(fv)	AS-41/22-150E	(V4A)	41/22	150	2	0,345	10,50	30,00
AS-41/22-200	(fv)	AS-41/22-200E	(V4A)	41/22	200	2	0,460	12,00	36,00
AS-41/22-250	(fv)	AS-41/22-250E	(V4A)	41/22	250	2	0,575	13,50	42,00
AS-41/22-300	(fv)	AS-41/22-300E	(V4A)	41/22	300	2	0,690	15,00	47,50
AS-41/22-350	(fv)	AS-41/22-350E	(V4A)	41/22	350	3	0,805	18,50	60,00
AS-41/22-400	(fv)	AS-41/22-400E	(V4A)	41/22	400	3	0,920	20,00	65,50
AS-41/22-550	(fv)	AS-41/22-550E	(V4A)	41/22	550	3	1,265	24,50	82,50
AS-41/22-800	(fv)	AS-41/22-800E	(V4A)	41/22	800	4	1,840	35,00	119,00
AS-41/22-1050	(fv)	AS-41/22-1050E	(V4A)	41/22	1050	5	2,415	45,50	154,50
AS-41/22-3050	(fv)	AS-41/22-3050E	(V4A)	41/22	3050	13	6,900	126,00	435,00
AS-41/22-6070	(fv)	AS-41/22-6070E	(V4A)	41/22	6070	25	13,961	266,00	881,00

Pictures manufacturer tensile tests: <https://www.bgw-bohr.de/pdf/Ankerschienen Testversuche.pdf>

Anchor channels bent according to customer specifications on request.



The goods must be inspected for function by the customer as part of an incoming goods inspection.